

Backup and Restore MySQL Databases

XAMPP includes [phpMyAdmin](#), an open-source, browser-based tool for managing MySQL database servers. This guide walks you through the process of backing up and restoring a MySQL database using phpMyAdmin.


This guide assumes that you already have a PHP application that uses a MySQL database deployed on XAMPP. The example application used in this guide is [WordPress](#), although the steps outlined below will work for any application.

TIP


Remember that you can install WordPress quickly using the [Bitnami WordPress module for XAMPP](#).

To backup a MySQL database using phpMyAdmin, follow these steps:


1. Browse to <http://localhost/phpMyAdmin> or <http://127.0.0.1/phpMyAdmin>. If required, log in using your database access credentials. On a fresh XAMPP installation without any changes, you can log in as *root* with a blank password.
2. Select the database to be backed up from the list in the left navigation pane. In this case, we're backing up the WordPress database, which is named *bitnami_wordpress*.

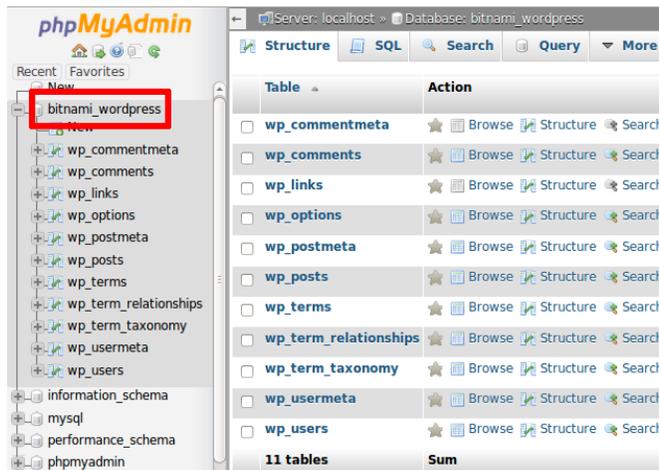

3. Select the "Export" command in the top navigation bar.
4. On the resulting page, select "Quick" as the export method and "SQL" as the output format. Click "Go" to proceed.

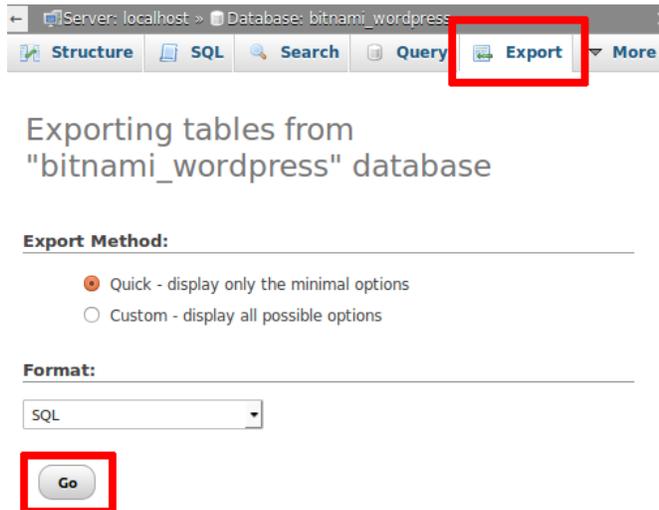


phpMyAdmin will export the database to a text file as a series of SQL statements. Once done, the browser will prompt you to download it to the desktop. This text file is your backup, so store it safely!

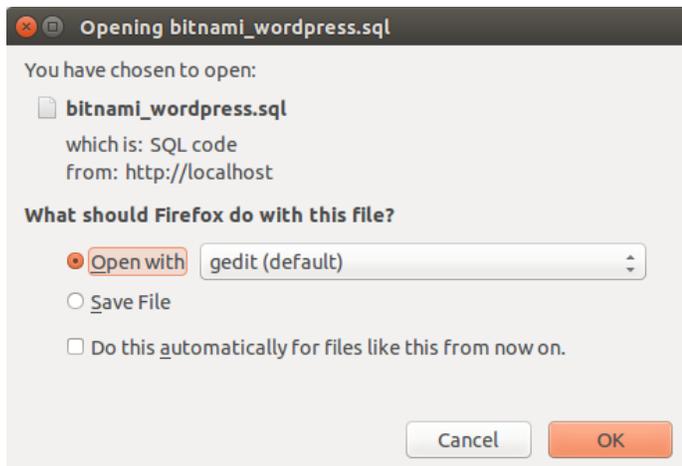


At a later point, you may wish to restore the database. To restore the data to a fresh MySQL database using phpMyAdmin, follow these steps:


1. Browse to <http://localhost/phpMyAdmin> or <http://127.0.0.1/phpMyAdmin>. If required, log in using your database access credentials.
2. Select the "New" command in the left navigation pane.

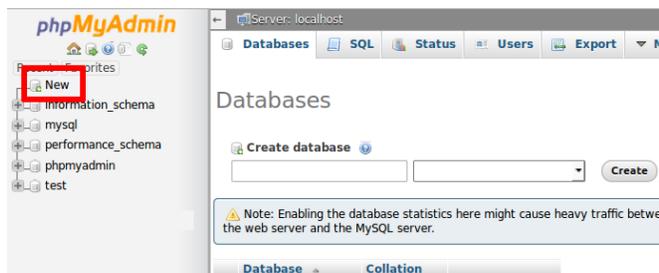


3. On the resulting page, enter a name for the new database (in this case, *myblog*). Select the collation "utf8_general_ci". Click "Create" to create the database.

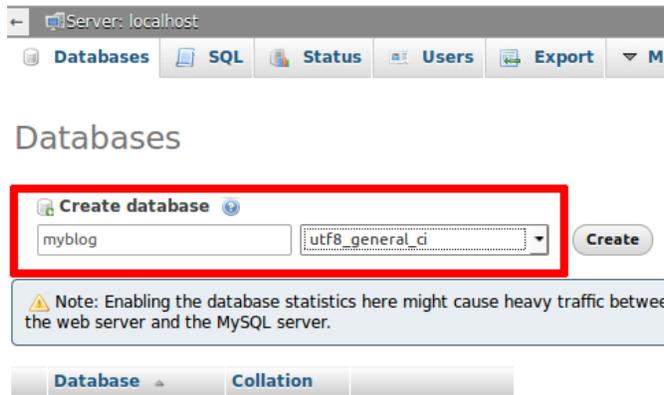


Once the database has been created, it will appear in the left navigation pane.

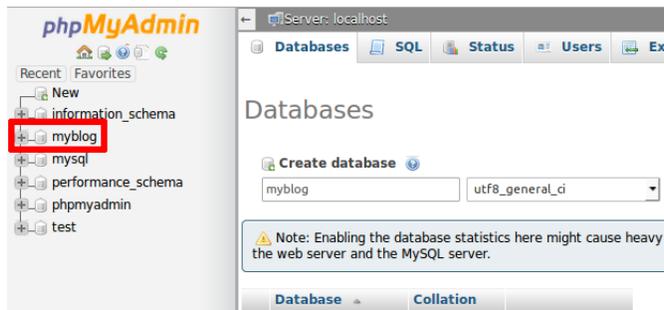


4. Select the new database from the left navigation pane. In the resulting page, select the "Import" command in the top navigation bar.
5. Click the "Browse..._" button and select the backup file created earlier. Click "Go" to proceed.

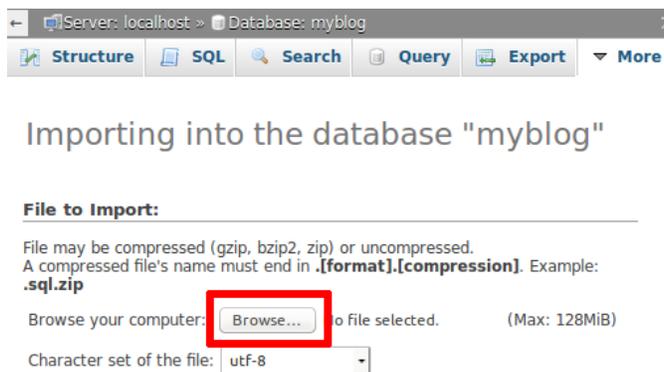

phpMyAdmin will import the data from the backup file. Once complete, you will see a screen indicating the status of the import.

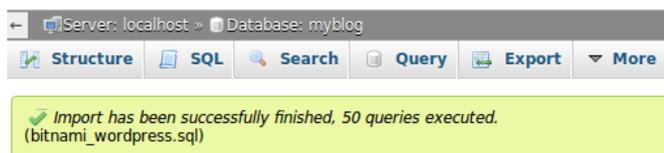

If you browse the contents of the database, you should now see your original data.

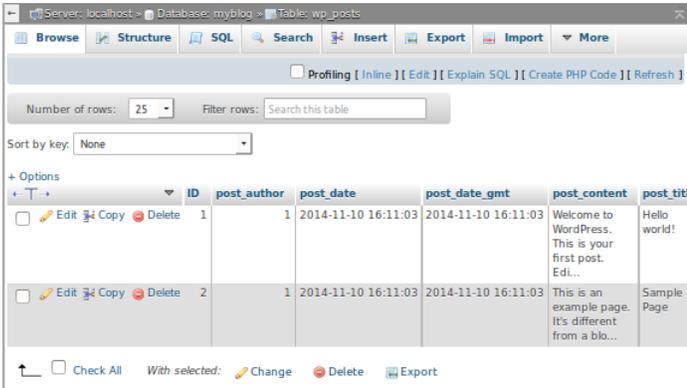

The screenshot shows the phpMyAdmin interface for a MySQL database named 'myblog'. The table 'wp_posts' is selected, and it contains two rows of data. The table has columns for ID, post_author, post_date, post_date_gmt, post_content, and post_title. The first row has ID 1, post_author 1, post_date 2014-11-10 16:11:03, post_date_gmt 2014-11-10 16:11:03, post_content 'Welcome to WordPress. This is your first post. Edi...', and post_title 'Hello world!'. The second row has ID 2, post_author 1, post_date 2014-11-10 16:11:03, post_date_gmt 2014-11-10 16:11:03, post_content 'This is an example page. It's different from a blo...', and post_title 'Sample Page'.

ID	post_author	post_date	post_date_gmt	post_content	post_title
1	1	2014-11-10 16:11:03	2014-11-10 16:11:03	Welcome to WordPress. This is your first post. Edi...	Hello world!
2	1	2014-11-10 16:11:03	2014-11-10 16:11:03	This is an example page. It's different from a blo...	Sample Page

You should now update your application's configuration and point it to your newly-created database. For example, with the Bitnami WordPress module, you will need to edit the *wp-config.php* file in the *apps\wordpress\htdocs* subdirectory of your XAMPP installation directory. Within this file, you will need to update the *DB_NAME* constant to use the new database name.

```
root@xampp: /opt/lampp/apps/wordpress/htdocs
<?php
/**
 * The base configurations of the WordPress.
 *
 * This file has the following configurations: MySQL settings, Table Pre
 * Secret Keys, WordPress Language, and ABSPATH. You can find more infor
 * by visiting {@link http://codex.wordpress.org/Editing_wp-config.php E
 * wp-config.php} Codex page. You can get the MySQL settings from your w
 *
 * This file is used by the wp-config.php creation script during the
 * installation. You don't have to use the web site, you can just copy t
 * to "wp-config.php" and fill in the values.
 *
 * @package WordPress
 */

// ** MySQL settings - You can get this info from your web host ** //
/** The name of the database for WordPress */
define('DB_NAME', 'bitnami_wordpress');

/** MySQL database username */
define('DB_USER', 'bn_wordpress');
```

NOTE

By default, PHP (and therefore phpMyAdmin) is configured to only accept uploads up to 128 MB in size. If your database is larger than this, you need to modify the PHP configuration file to accept a larger upload size. To do this, edit the *php.ini* file in the *etc* subdirectory of your XAMPP installation directory and increase the values of the *post_max_size* and *upload_max_filesize* variables. Save your changes and restart Apache for the changes to take effect.